

## TLP Lowest Loss, High Volume Laminates

**TLP** laminates are constructed with a woven matrix of fiber-glass fabric coated with PTFE that is more mechanically stable and has a more uniform dielectric constant than traditional non-woven products. The exceptionally low dissipation factor extends the usefulness of this product to 35 GHz and above.



TLP laminates offer a cost effective solution for low loss antenna and radar applications. These laminates can be sheared, drilled, milled and plated using the accepted methods for PTFE/woven fiberglass laminates. The laminates are dimensionally stable and are resistant to the solvents and reagents used during fabrication.

Taconic is a world leader in RF laminates and high speed digital materials, offering a wide range of high frequency laminates and prepregs. These advanced materials are used in the fabrication of antennas, multilayer RF and high speed digital boards, interconnections and devices.

### Benefits & Applications:

- Dimensionally Stable
- Low Loss
- High Peel Strength
- Low Moisture Absorption
- Uniform, Consistent Dk

- Automotive Radar
- Low Loss Antennas
- Collision Avoidance Systems

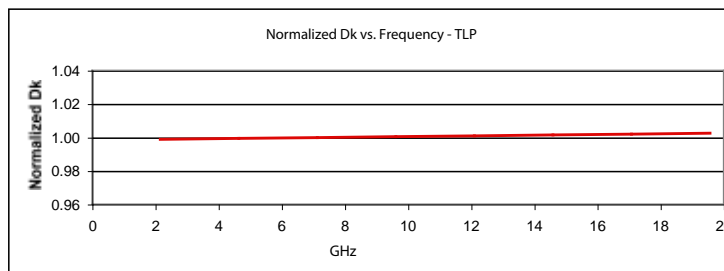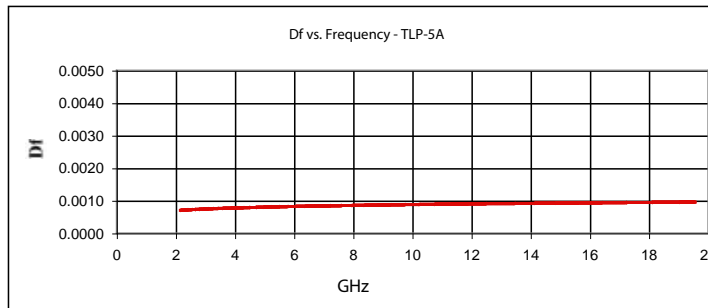

#### Asia / Australia

Korea Taconic Company  
Republic of Korea  
Tel: +82-31-704-1858  
sales@taconic.co.kr

#### China

Taconic Advanced Material  
(Suzhou) Co., Ltd.  
Suzhou City, China  
Tel: +86-512-286-7170  
tssales@taconic.co.kr

#### North & South America

AGC Nelco America Inc.  
Tempe, AZ 85281  
Tel: (480) 967-5600  
TaconicPO@agc-nelco.com

#### Europe/Middle East

Neltec SA  
Lannemezan, France  
Tel: +33(0)5 62 98 52 90  
neltecsales@agc-nelco.com

# TLP Lowest Loss, High Volume Laminates

TLP Typical Values					
Property	Test Method	Unit	Value	Unit	Value
Dk @ 10 GHz	IPC-650 2.5.5.5		2.17 - 2.33 +/-0.03		2.17 - 2.33 +/-0.03
Df @ 10 GHz	IPC-650 2.5.5.5		0.0009		0.0009
Moisture Absorption	IPC-650 2.6.2.1	%	<0.02	%	<0.02
Dielectric Breakdown	IPC-650 2.5.6	Kv	>60	Kv	>60
Volume Resistivity	IPC-650 2.5.17.1	Mohms/cm	10 <sup>7</sup>	Mohms/cm	10 <sup>7</sup>
Surface Resistivity	IPC-650 2.5.17.1	Mohms	10 <sup>7</sup>	Mohms	10 <sup>7</sup>
Arc Resistance	IPC-650 2.5.1	seconds	>180	seconds	>180
Flex strength (MD)	IPC-650 2.4.4	lbs./inch	>12,000	N/mm <sup>2</sup>	>83
Flex strength (CD)	IPC-650 2.4.4	lbs./inch	>10,000	N/mm <sup>2</sup>	>69
Peel Strength (CH)	IPC-650 2.4.8	lbs./linear inch	10.0	N/mm	1.75
T <sub>d</sub> (2% Wt. Loss)		°F	>932	°C	>500
Melt Point		°F	620	°C	327
Thermal Conductivity	ASTM F 433	W/m/K	0.22	W/m/K	0.22
CTE (X-Y axis)	ASTM D 3386	ppm/°C	20	ppm/°C	20
CTE (Z axis)	ASTM D 3386	ppm/°C	280	ppm/°C	280

Designation	Dk
TLP-5A	2.17 +/-0.03
TLP-5	2.20 +/- 0.03
TLP-3	2.33 +/- 0.03

Typical Thicknesses <sup>1</sup>	
Inches	mm
0.0050	0.13
0.0100	0.25
0.0200	0.51
0.0310	0.78

Available Sheet Sizes <sup>2</sup>	
Inches	mm
12 x 18	304 x 457
16 x 18	406 x 457
18 x 24	457 x 610
16 x 36	406 x 914
24 x 36	610 x 914
18 x 48	457 x 1220

<sup>1</sup>Other thicknesses may be available. Please call for information.

<sup>2</sup>Our standard sheet size is 36" x 48" (457 mm x 610 mm). Please contact our customer service department for availability of other sizes.

Available Copper Cladding						
Designation	Weight	Copper Thickness		R <sub>MS</sub> Treated Side		Description
CVH (CH)	1/2 oz / ft <sup>2</sup>	~0.0007"	~18 μm	27 μin	0.7 μm	Very low profile / Electrodeposited
CVI (C1)	1 oz / ft <sup>2</sup>	~0.0014	~35 μm	25 μin	0.6 μm	Very low profile / Electrodeposited

Heavy metal claddings (aluminum, brass & copper) may also be available upon request. Please call for information.

An example of our part number is: TLP-005-CVH/CVH - 18" x 24" (457 mm x 610 mm)



Compliant  
rev. 10/08

All reported values are typical and should not be used for specification purposes. In all instances, the user shall determine suitability in any given application.